

ROLL-OR-KARI WEB LOCK AND TIGHTENER

THREADING DIRECTIONS

Follow closely until familiar with threading.

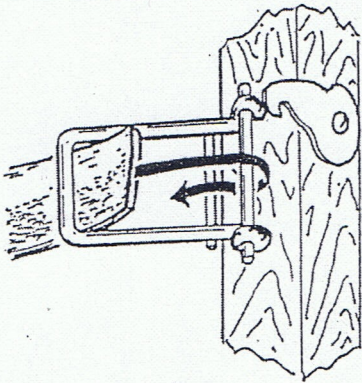


Figure 1

Hold Locking Device in Extreme Outward Position

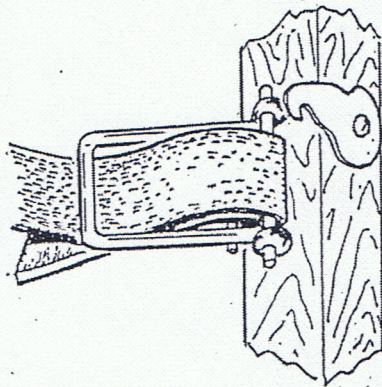


Figure 2

Guide Strap Through Large Opening Around Hinge Post. Pull End Through Until in Approximate Adjustment.

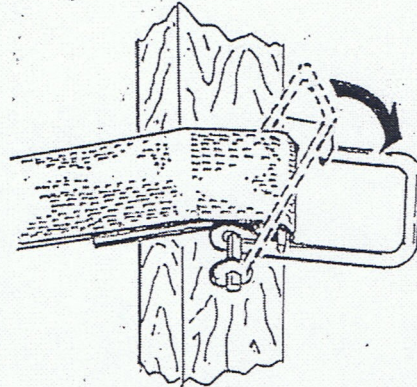


Figure 3

Swing Locking Device to Locking Position.

NOTE: End of Strap is Inside of Tightened Strap When Correctly Threaded.

CAUTION: Do Not Raise Load Until Straps Are Tightened.
FOR LONGER LIFE OF TRUCKS, KEEP NUTS AND BOLTS TIGHTENED.

FOR TOLL FREE
PHONE ORDERS ONLY
1-800-631-7351

ELKAY PRODUCTS CO., INC. 35 Brown Avenue • Springfield, N. J. 07081
Manufacturers Since 1929 • (201) 376-7550

For Customer Service
Call (201) 376-7550